

Polytij®


S3i HP thermal inkjet printer

Enhanced flexibility & adaptability

The POLYtij® S3i HP thermal inkjet printer is a fully featured printer capable of high resolution printing with incredibly simple operation & low cost performance.



glass - metal - plastics

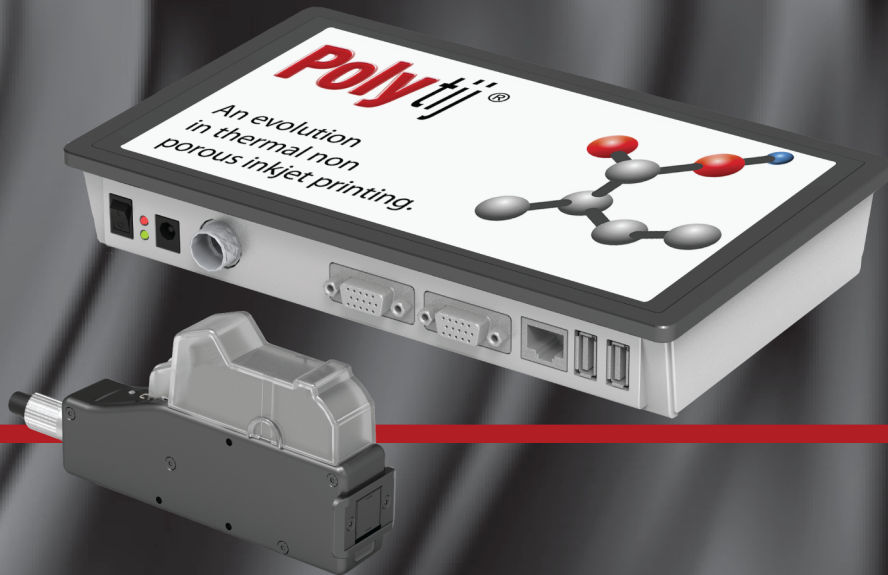

- Full optioned printer
- IP 65 display touchscreen
- Covered printhead
- Text, barcodes & logos
- Suited for applications in food processing, cosmetics and pharmaceutical
- POLYtij® freedom textblack

Polytij®

S3i HP thermal inkjet printer

Your reliable partner in coding
CODE PLUS

TEL.: 02 570 2721

www.codeplus.co.th

admin@codeplus.co.th

DIGITAL INK TECHNOLOGIES PTY LTD
1&2, 74 Mason Street,
Campbellfield, Victoria, 3061
Australia
Web: www.digitalinktechnologies.com.au
Email: diti1161@me.com
Telephone: +613 93575533



Technical Specifications

Specification	Controller: 255*140*36mm (H*W*D) / 10*5.5*1.4 inch Printhead: 175*52*33mm (H*W*D) / 6.9*2.0*1.3 inch
Language	Chinese, English, Japanese, French, Korean, German, Spanish, Portuguese, and Russian
Resolution	50~600DPI
Printable heights (mm)	1~12.5mm.
Printing speed	0-60 m/min(300 DPI), 0-30 m/min(600 DPI)
Production speed	Production speed can be set as request, automatic calculation and external synchronizer
Barcode	UPCA, UPCE, EAN13, EAN8, INT25, CODE39, CODE 128, EAN128, PDF417, DATAMATRIX, QR, ITF14, Code93
Date format	Variety of date formats available and can be customised.
Interface	8 inch 1280*720 capacitance shielded
Port	1) Ethernet: Support PC software communication protocol/SDK 2) USB2.0: Support U-Disk 3) DB15: For external devices like photocell, synchronizer or alarm kit connection
Ink management	Identifies ink type automatically and recommends the best printing parameter for the ink type used in printer. Original authentic HP 45si ink cartridges used. Automatic measuring system for ink consumption
Installation	Conveyor mount included. Optional floor mount printhead stand available.
Power supply	AC 100V-240V 50-60HZ, 90W (Specified AC adaptor)
Certificate	CE, FCC
Print content	Barcode, alphabetic, numeric, Chinese, image, date, shift group, counter, scanner
Font	Default font is Arial bold; allow users to load whatever fonts they need. Courier font is also installed for polymer thermal inks.
Multi-management	Customized different users and rights